

Cell Switch Prime


T-Mobile SIM Card
Included at No Charge
For easy activation.

RANGE

Access Control

CELLULAR ACCESS CONTROL RELAY

BFT-SWITCH-PRIME

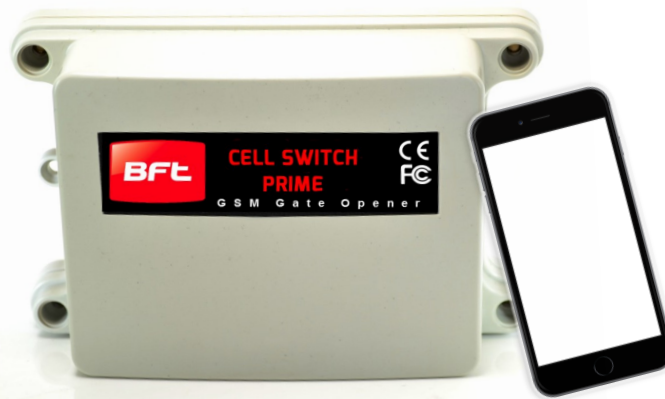


Open gates with
an APP.



Bft Call Box Switch

- 100 number caller ID access.
- 3G modem inside.
- 1 input alarm contact, calling 4 numbers.
- 1 status input for checking gate status.
- 2 Momentary and latching relay outputs.
- SMS and caller ID control of relay.
- 2A, 24v max dry contact output.
- iPhone and Android control app available.
- 3 year warranty.

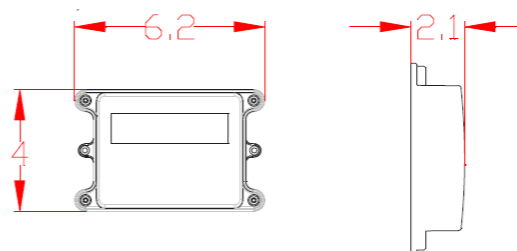

General

Voltage: 12v dc – 24v ac.

Solar operable: Yes.

Current on standby: 55mA.

Operating Current: 300mA.

Peak Demand Current: 2 amps.

Cellular module

Relays: 2 relays, max 2 amps, 24v ac/dc load.

Latching: Yes.

Caller ID users: 100.

Programming: SMS.

Network compatibility: AT&T, T-Mobile.



BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com

➔ www.bftautomation.com